



POST-IT

OPT-POSTER IS AN ULTRA-THIN, PORTABLE, ALL-IN-ONE LED DISPLAY. IT FEATURES AN EYE-CATCHING 2.5MM DISPLAY AND A VARIETY OF MOUNTING OPTIONS. THE OPT-POSTER REALLY IS PLACE, PLUG, AND PLAY.



OPT-POSTER

INDOOR LED DISPLAY TECHNOLOGY



**±1,000 NITS
DIRECT VIEW LED**

±100,000¹ Hours lifetime.
24/7 Playback reliability.
¹Approximate

**2.5MM
PIXEL PITCH**

High pixel density SMD tiles. 68 billion colors and 16-bit grayscale.



**STAND-ALONE
DESIGN**

Slim 1.6" (depth). Floor², wall², kickstand², or ceiling² mount options.
²Optional



**165° VIEWING
ANGLES**

View the display easily from wide angles creating greater visual impact.



CONNECTIVITY

Network with, Ethernet, wireless³, WIFI³, or cellular³ technology.
³Optional



**MULTIPLE POSTER
DISPLAY**

Single or multiple poster display. Connect more than one display for a continuous visual effect.



**60 FPS
VIDEO PLAYBACK**

Smooth full motion video playback.



**FRONT
SERVICEABLE**

Quick release tiles allow for fast, easy display maintenance.



**CLOUD-BASED
SOFTWARE⁴**

Control, network, and diagnose displays from anywhere with DNET 3.0.
⁴Optional

OPT-POSTER

INDOOR LED DISPLAY TECHNOLOGY

Display

Pixels (mm)	2.5
Brightness (Nits)	±1,000
Display Matrix (SMD) (HxW)	756x224
Color	68 Billion Colors
Viewing Angle	160° Horizontal; 160° Vertical
Contrast Enhancement	Matte Black Mask
LED Surface Protection	Polycarbonate
Color Processing	16-Bit Grayscale
Dimming	100 Levels
Average LED Lifetime	±100,000* Hours
Color Temperature	6500K (Adjustable)

Graphic & Video Support

Display Capability	Video, Graphic, Text
Video Frame Rate	60 FPS
Refresh Rate	±1920 Hz
Storage	Configurable

Enclosure

Cabinet Construction	Aluminum
Serviceability	Front
Cabinet Size: 77.5"h x 22.7"w x 1.6"d	Cabinet Weight: 77 lbs* <small>*± 10%</small>
Mount*	Vesa; Pendant/Ceiling; Kickstand; Floor <small>*Optional.</small>

Communication

Communication	USB 2.0, Ethernet, WiFi*, Cellular* <small>*Optional</small>
---------------	---

Electrical & Operating Requirements


Power (Max)	±600w
Power (Average)	±210w
AC Power	110/240VAC 60Hz.
Operating Temp. / Humidity	±14°~122°F / ±10~90%

Software

Cloud-Based	DNET 3.0* <small>*Optional. System upgrade (additional fee) required.</small>
-------------	--

Limited Warranty & Service

Warranty	1-Year Parts & In-Factory Labor
----------	---------------------------------

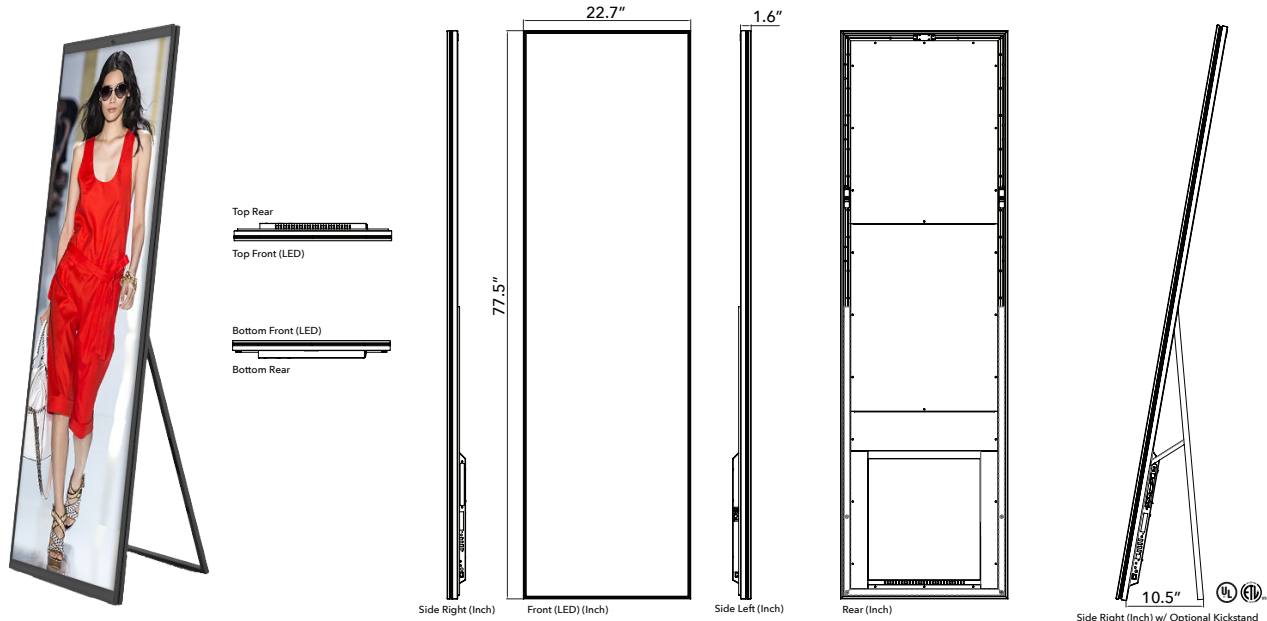

Worldwide Headquarters
 1700 S. De Soto Place, Ontario, CA 91761 USA
 Phone: +1.800.876.1668 Fax: +1.626.369.7858
www.optec.com