

BIG DIGITS

DIGIT-PC IS A BRIGHT, LED DISPLAY WITH ALL-WEATHER PERFORMANCE. EACH DISPLAY IS DESIGNED TO DELIVER VIBRANT, CLEAR CHARACTERS AND WORK TO INCREASE VISIBILITY AND CREATE LASTING VALUE.

DIGIT-PC: 36" Character


DIGIT-PC

OUTDOOR LED DISPLAY TECHNOLOGY



±5,000 NITS BRIGHTNESS

x10 Brighter than an LCD TV¹. View in full daylight and dimmable at night.

¹Based on LCD TV avg. 500 Nits.

8-36 INCH

CHARACTER OPTIONS

Large IP65 LED diodes, ±100,000² hours lifetime, Custom sizes available*.

²Approximate *Special (bulk) order only.


IP65 FRONT/IP54 REAR ALL-WEATHER TESTED

UV, salt-mist, vibration, ±temperature, voltage, and x2 waterproof tested.



120° HORIZONTAL VIEWING ANGLE

View the display easily from wide angles creating greater visual impact.

¹³

AI

ALUMINUM CABINET DESIGN

Lightweight, weather resistant, aluminum cabinet design.



FRONT SERVICEABLE

Front service allows for fast, easy maintenance.



REDUNDANT DATA SIGNAL

The display receives two sets of data signals in case one is deficient.



CASCADING SUPPORTED

Connect up to 8 faces together and remote control the displays.



CONNECTIVITY

Wireless remote¹, RS232², LAN³, or Cellular⁴.

¹Up to 150ft. (line of sight).
²Optional. Adaptor required.


3 YEAR WARRANTY

3-Year parts and in-factory labor.
10-Year parts availability.

DIGIT-PC

OUTDOOR LED DISPLAY TECHNOLOGY



Display Front

Display

Character ^{1*} (H) (Inch)	Brightness (Nits)
8*	5,000**
10*	5,000**
12*	5,000**
16*	5,000**
18	5,000**
24	5,000**
30*	5,000**
32*	5,000**
36*	5,000**

*Custom sizes available. **Special (bulk) order only. ***± 5%

LED Color Red, Amber*, or Green

*Special (bulk) order only.

Viewable Angle 120° Horizontal; 60° Vertical

Contrast Enhancement Black Aluminum w/Holed Face

Dimming 4-16 Levels

Average LED Lifetime ±100,000* Hours

*Average

LED Surface Protection* Polycarbonate

*Optional

Digit Layout 8.88^{9*}, 8.88^{9/10}, 88.88, 888.8

*Default

Graphic & Video Support

Display Capability Numeral

Communication

Communication Wireless Remote¹, RS232*, LAN*, Cellular*¹8 Key remote. Up to 150ft. (line of sight). *Optional. Adapter required.

Enclosure

Cabinet Size (H)x(W)x(D) (Inch)	Cutout Dimensions (H)x(W) (Inch)	Cabinet Weight (lbs)	Power (Watt) Max
14.69 x 25.67 x 2.99*	12.05 x 23.03	12	12
16.75 x 29.02 x 2.99*	14.09 x 26.38	15	25
18.90 x 36.50 x 2.99*	16.26 x 33.86	20	25
22.76 x 43.66 x 2.99*	20.12 x 41.02	29	34
24.41 x 48.39 x 2.99*	21.77 x 45.75	35	37
31.38 x 64.61 x 2.99*	27.95 x 61.18	60	71
38.03 x 79.37 x 2.99*	34.61 x 75.83	87	98
39.45 x 82.20 x 2.99*	36.02 x 78.66	97	104
43.70 x 87.60 x 2.99*	40.28 x 84.25	119	119

*2.99" Standard depth. 1.2" Ultra-slim depth available (requires external control box).

Cabinet Construction Aluminum

Serviceability Front

Waterproofing (Front/Rear) IP65/IP54

Manufacturing Quality Standard ISO 9001

Electrical & Operating Requirements

AC Power 120/240VAC 60Hz.

Operating Temp. / Humidity ± -20°~140°F / ±10~90%


Software

PC GPC*

*Available for non-wireless remote users only.

Limited Warranty & Service

Warranty 3-Year Parts & In-Factory Labor

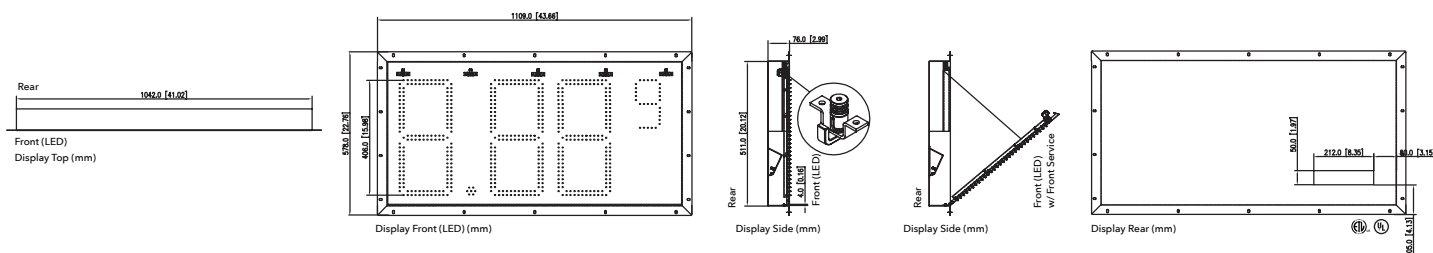

16" Character (Shown)



Worldwide Headquarters
1700 S. De Soto Place, Ontario, CA 91761 USA
Phone: +1.800.876.1668 Fax: +1.626.369.7858
www.optec.com